



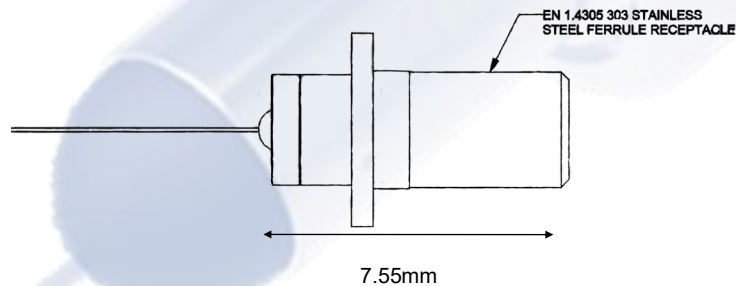

# Hermetic TROSA Receptacles

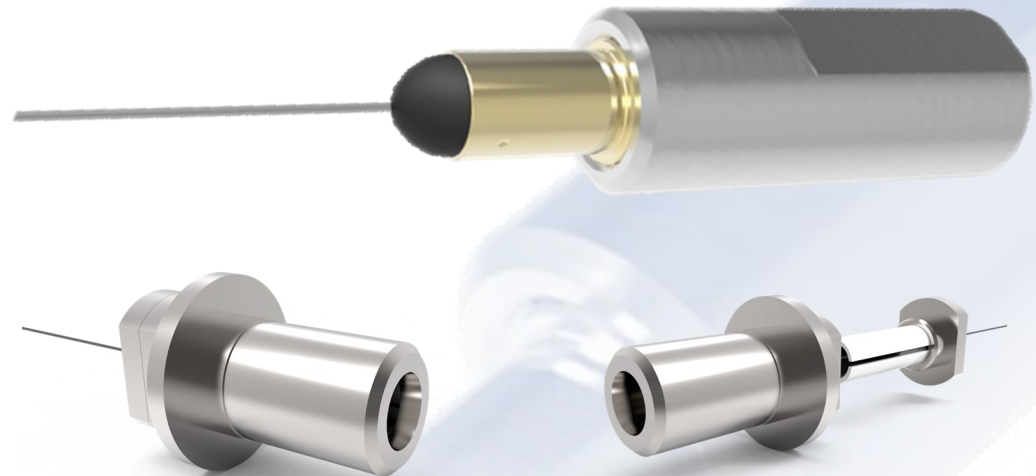

## Optical Fiber Packaging Ltd.

Hollands Centre  
Hollands Road Industrial Estate  
Haverhill  
Suffolk  
England CB9 8PR UK

Phone: +44 (0) 1440-766636  
E-mail: sales@ofpgco.com

## Applications

OFP's Mini LC/MU Receptacle devices are used to interface 1.25mm LC or MU style connectors to pigtailed TX or RX devices.

Designed to suit customers target applications they are available for Singlemode and Multimode fiber products

## Features

- Singlemode or Multimode
- Precision SS 303 parts
- Meet all Telcordia GR326 requirements
- Custom connectorized pigtails with low bend loss fiber ready for assembly
- Available with internal high-end isolators

## Typical Specifications

- Typical IL  $\leq 0.15$  dB SM
- Typical ORL - 55 dB SM
- Visual end face criteria to IEC-61300-3-35
- Meets & exceeds difficult 'wobble test' criteria
- SM fiber minimum bend radius 7mm
- 100% interferometry tested

[www.ofpgco.com](http://www.ofpgco.com)