

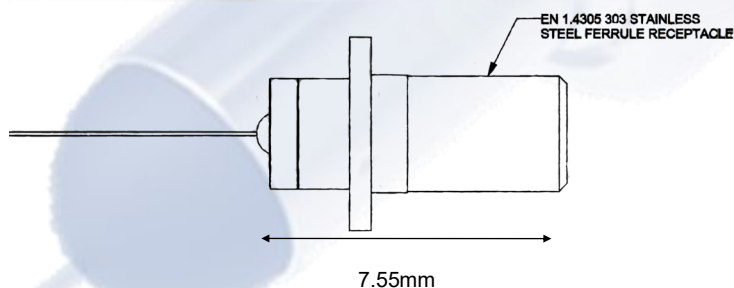


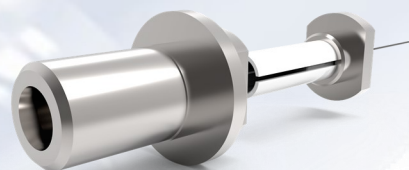

Hermetic TROSA Receptacles

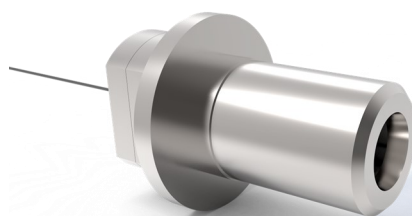

Optical Fiber Packaging Ltd.

Hollands Centre
Hollands Road Industrial Estate
Haverhill
Suffolk
England CB9 8PR UK

Phone: +44 (0) 1440-766636
E-mail: sales@ofpgco.com

Applications

OFP's Mini LC/MU Receptacle devices are used to interface 1.25mm LC or MU style connectors to pigtailed TX or RX devices.

Designed to suit customers target applications they are available for Singlemode and Multimode fiber products

Features

- Singlemode or Multimode
- Precision SS 303 parts
- Meet all Telcordia GR326 requirements
- Custom connectorized pigtails with low bend loss fiber ready for assembly
- Available with internal high-end isolators

Typical Specifications

- Typical IL ≤ 0.15 dB SM
- Typical ORL - 55 dB SM
- Visual end face criteria to IEC-61300-3-35
- Meets & exceeds difficult 'wobble test' criteria
- SM fiber minimum bend radius 7mm
- 100% interferometry tested

www.ofpgco.com